



# LIR18650 Lithium Ion Battery

## Brief Datasheet

### 1 Dimension


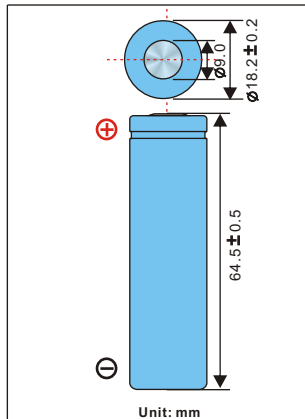


### 3 Electrical Characteristics

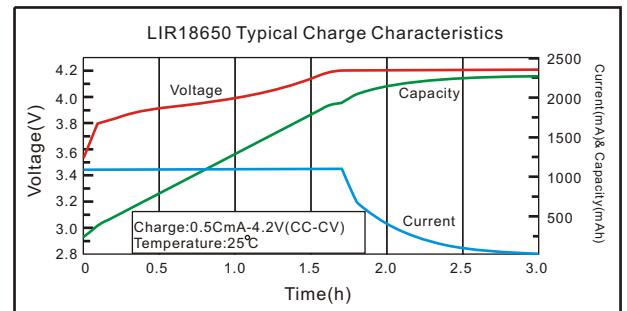

### 2 Basic Specification

Nominal Voltage		3.7V
Nominal Capacity	Typical	2000mAh (0.2C discharge)
	Minimum	2000mAh (0.2C discharge)
Charge method		CC/CV (Constant Current-Constant Voltage) current:0.5C Voltage:4.2V End current: 20mA
Charging Voltage		4.20V±0.05V
Charging Std. Current		1000mA
Max Current	Charge	1500mA
	Discharge	3000mA
Ambient Temperature	Std.Charge	-20°C to 45°C
	Discharge	-20°C to 60°C
	Storage	-5°C to 35°C
Discharge cut-off voltage		2.75V
Internal Impedance		≤80mΩ
Cycle life		>300cycles(≥80% capacity)
Nominal Weight		Approx.45g

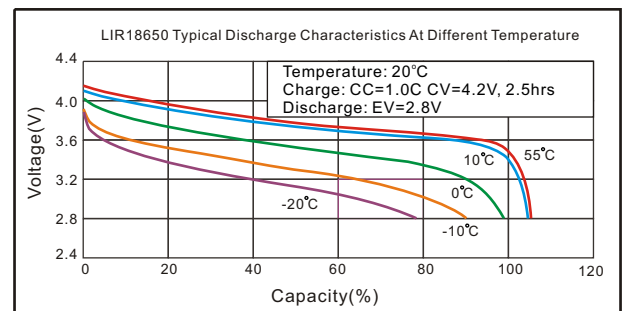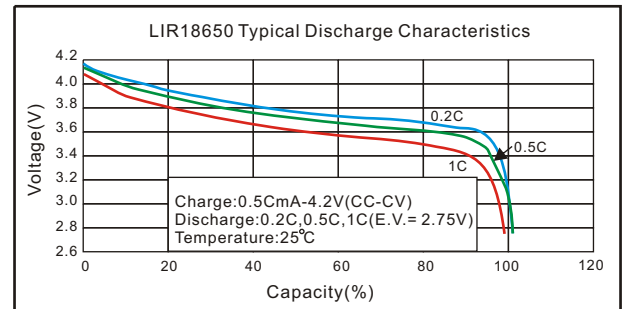

Note:\*1C = 1 Capacity

# Li-ion

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.