



NH-AA1600 *Brief datasheet*

Nickel Metal Hydride Battery

1 Dimension


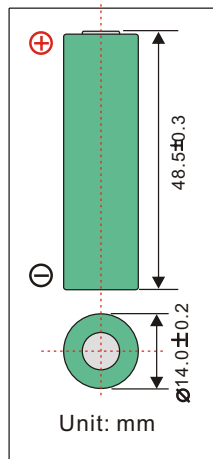


3 Electrical Characteristics

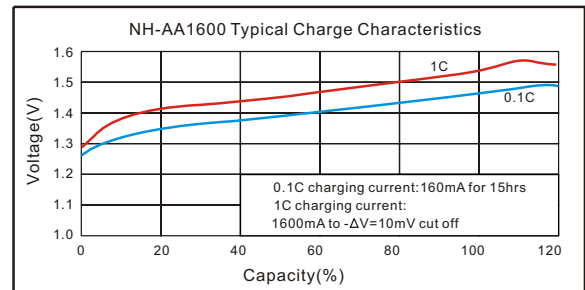

2 Basic Specification

Nominal Voltage		1.2V	
Nominal Capacity*	Typical	1650mAh (0.2C discharge)	
	Minimum	1600mAh (0.2C discharge)	
Charge	Standard	160mA for 15hrs	
	Fast	1600mA for Approx. 72 mins	
Internal Impedance		$\leq 25m\Omega$ Upon fully charged	
Life Cycles IEC61951-2 (2003) 7.4.1.1		500 cycles	
Operation Temperature	Charge	Standard	0°C to 45°C
		Fast	10°C to 40°C
	Discharge		-20°C to 50°C
	Storage	<1year	-10°C to 30°C
<3month		-10°C to 40°C	
Discharge cut-off voltage		1.0V	
Weight		Approx. 29g	

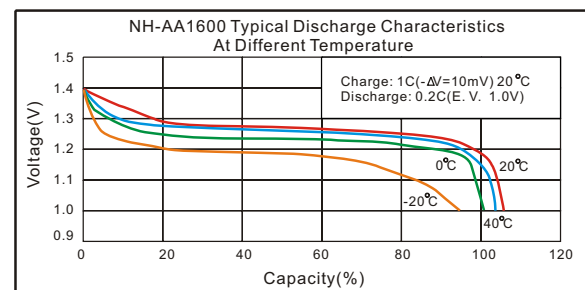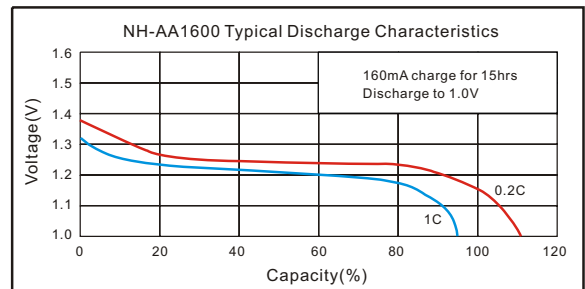

Note: *Typical values relative to cells stored for less than 3 months or less at 30°C max.

*After charging at 0.1C for 16 hours.

*We recommend cells or batteries are charged once every 3 months.

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

Ni-MH

Autec Battery LTD.

Add : 667 E. Cochran St. Simi Valley, CA 93065

Tel: 805-522-0888 Fax: 805-522-8777

E-mail : battery@autec.com Website: www.autecbattery.com