



# NH-AA1900 *Brief datasheet*

## Nickel Metal Hydride Battery

### 1 Dimension


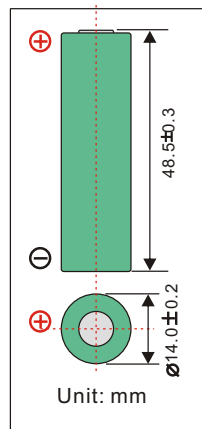


### 3 Electrical Characteristics

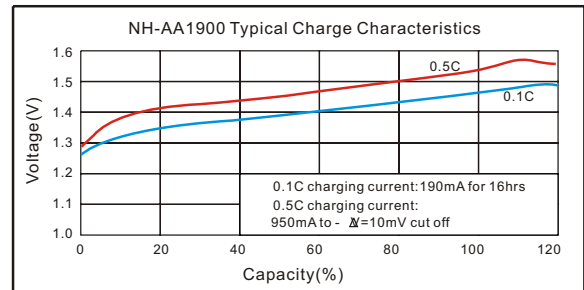

### 2 Basic Specification

Nominal Voltage		1.2V	
Nominal Capacity*	Typical	1950mAh (0.2C discharge)	
	Minimum	1900mAh (0.2C discharge)	
Charge	Standard	190mA for 16hrs	
	Fast	950mA for Approx. 150 mins	
Internal Impedance		$\leq 35m\Omega$	
Life Cycles		500 cycles	
Operation Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge		-10°C to 50°C
	Storage	<1year	-10°C to 30°C
<3month		-10°C to 40°C	
Discharge cut-off voltage		1.0V	
Weight		Approx. 28g	

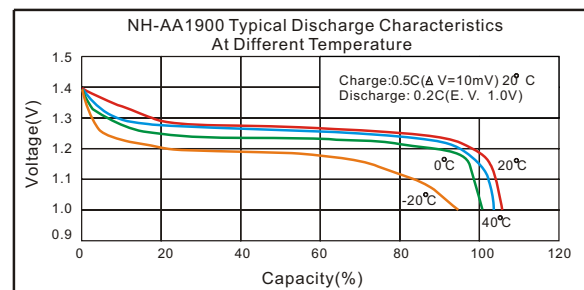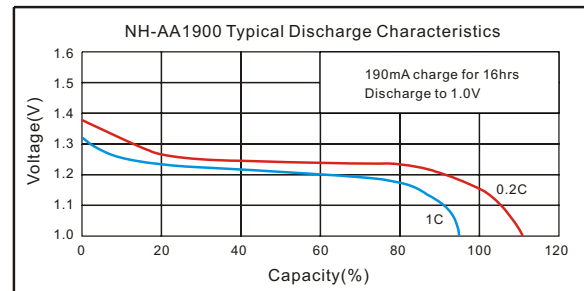

Note: \*Typical values relative to cells stored for less than 3 months or less at 30°C max.

\*After charging at 0.1C for 16 hours.

\*We recommend cells or batteries are charged once every 3 months.

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

Autec Battery LTD.

Add : 667 E. Cochran St. Simi Valley, CA 93065

Tel: 805-522-0888 Fax: 805-522-8777

E-mail : battery@autec.com Website: www.autecbattery.com

Ni-MH