



# NH-AAA650

## Nickel Metal Hydride Battery

### 1 Dimension


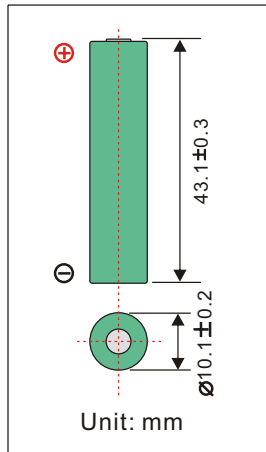


### 3 Electrical Characteristics

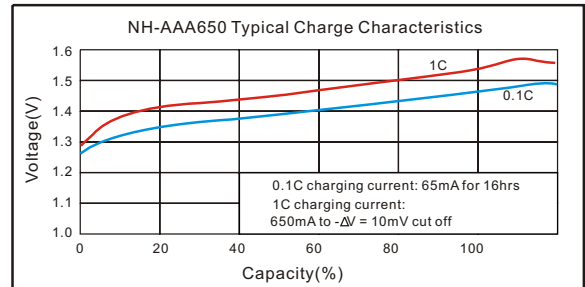

### 2 Basic Specification

Nominal Voltage		1.2V	
Nominal Capacity	Typical	700mAh (0.2C discharge)	
	Minimum	650mAh (0.2C discharge)	
Charge	Standard	65mA for 16hrs	
	Fast	650mA for approx. 75mins	
Internal Impedance		$\leq 45\text{m}\Omega$	
Life Cycles		500 cycles	
Operation Temperature	Charge	Standard	0°C to 40°C
		Fast	10°C to 40°C
	Discharge	-10°C to 50°C	
Storage	<1year	-10°C to 30°C	
	<3month	-10°C to 40°C	
Discharge cut-off voltage		1.0V	
Weight		Approx. 13g	

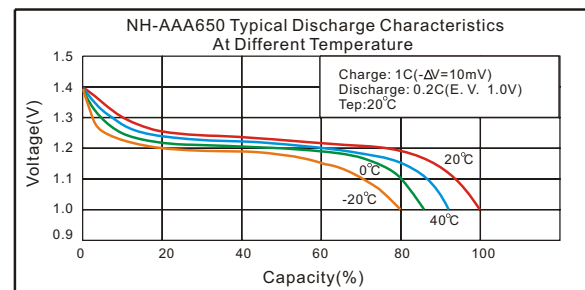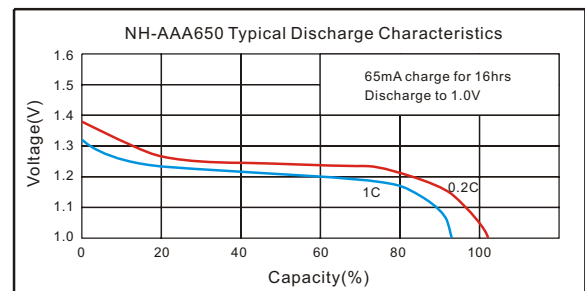

# Ni-MH

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.